



WIDE-AREA SURVEILLANCE FOR DESERT ENVIRONMENTS

FLIR Ranger® R5

The FLIR Ranger® R5 is a ground-based radar, designed to withstand the rigors of a desert environment. Providing 24/7 security to ranges of up to 5,000 meters, the Ranger R5 scans a full 360° every second, effectively monitoring up to 78 square kilometers (30 square miles). Multiple units can be installed with overlapping coverage areas to protect larger areas such as borders. Network with FLIR EO/IR imagers to initiate slew-to-cue capability.

Operating in the Ka-band, this radar is compact and highly portable. Easily network other FLIR radars and EO/IR images for slew-to-cue capabilities. Ideal for desert environments, border security, force protection, and critical infrastructure protection, R5D provides fast and accurate detection of up to 500 threats simultaneously.

FEATURES

MULTIPLE SECURITY APPLICATIONS

Whether securing airports, seaports, borders, critical infrastructure, or for force protection, FLIR radars provide an ideal wide-area surveillance solution.

LOW FALSE ALARM RATE

Accuracy, ease of operation, and the lowest false alarm rate in the industry, separates FLIR Ranger radars from the competition.

INTEGRATED PROTECTION

Network multiple FLIR radars and EO/IR imagers with FLIR command and control to form a single powerful, integrated surveillance system.

FAST, ACCURATE THREAT DETECTION

R5 quickly detects up to 500 threats simultaneously while accurately displaying each target's location.

RELIABLE OPERATION & EASY INTEGRATION

High availability rate saves on costs for spare systems or repairs, and it requires only one cable and four bolts for integration.

APPLICATIONS

DETECT PERSONNEL AND VEHICLES

SECURE BORDERS

MONITOR PORTS, AIRPORTS, AND MILITARY BASES

CRITICAL FACILITIES PROTECTION


SPECIFICATIONS

R5	
Target Types	Moving, Less than 0.1 m/s min Vehicles and personnel
Target Velocity	0.1 to 50 m/s
Frequency	Ka Band
Resolution	0.7 m range, 1° azimuth
Scan Rate	One revolution per second (60 rpm)
Azimuth Beamwidth	1° (2-way)
Elevation Beamwidth	3.5° (2-way)
Elevation Control	Up: 3°; Down: 5° (fixed settings)
Input Power	20 to 30 VDC, 24 nominal
Radiated Power	Safe for human exposure
Communications	Ethernet, wireless, fiber
XML	Yes
False Alarm Rates	< 1 per 24 hours
Mask Zone(s)	Two selectable angular blanking zones Unlimited polygon detection zones
Network	8 per server; total unlimited
Dimensions	21.3 in h x 22.5 in diameter
Weight	37 lbs (17 kg)
Operating Range	10 - 5000 m
Detection Range*	10 - 3000 m, personnel walking 10 - 3000 m, personnel running 10 - 500 m, personnel crawling (low crawl) 10 - 1000 m, personnel crawling (hands & knees) 10 - 500 m, personnel swimming 10 - 5000 m, vehicles and watercrafts
Coverage Area	78 km2 (30 mi2)

*Clear air, low clutter

ENVIRONMENTAL

Temperature	-30° to +60°C (operating) -40° to +70°C (storage)
Humidity	50% +/- 5 to 95% +/- 4, non-condensing (60°C max)
Altitude	Up to 15,000 ft (operating and storage)
Wind	Up to 120 km/hr
Weather	Sealing Weather resistant (rain, snow, dust, sand, salt spray)
Power Consumption	45 watts
Environmental Ratings	IP65, NEMA 4
Data Bandwidth	Maximum: 1 MBits without PPI Maximum: 7 MBits with PPI
Protocol	ICD 0100

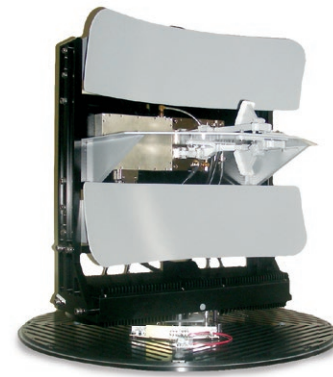

AMERICAS
CORPORATE
HEADQUARTERS
FLIR Systems Inc.
27700 SW Parkway Ave
Wilsonville OR 97070
+1 877.773.3547

Washington DC
2800 Crystal Drive
Suite 330
Arlington, VA 22202
PH: +1.703.416.6666

EUROPE

FLIR Systems
2 Kings Hill Avenue - Kings Hill
West Malling, Kent ME19 4AQ
United Kingdom
PH: +44 (0)1732 220 011
F +44 (0)1732 843 707

FLIR Systems AB
Antennvägen 6,
PO Box 737
SE-187 66 Täby
Sweden
PH: +46 (0)8 753 25 00

MIDDLE EAST

FLIR Systems B.V. - Abu Dhabi
Wadi Al Fey St.
Building 60, Office # 302
New Ministries Exit / Khalifa Park
Area
Abu Dhabi, U.A.E.
Office: +971 2 666 1561
e-Fax +1 503 914 1591

FLIR Systems Saudi Arabia
Office 127, First Floor
Akaria Plaza Building, Olaya Street
Riyadh, 11481, Saudi Arabia
Office: +966 11 464 5323
Fax +966 11 464 0438

ASIA

FLIR Systems Japan K.K.
Meguro Tokyu Bldg. 5F,
2-13-17
Kami-Osaki, Shinaga-
wa-ku.
Tokyo, 141-0021, Japan
T +81-3-6721-6648

For More Information contact
surveillance_sales@flir.com

www.flir.com
NASDAQ: FLIR

Equipment described herein is
subject to US export regulations
and may require a license prior
to export. Diversion contrary to
US law is prohibited. Imagery
for illustration purposes only.
Specifications are subject to
change without notice. ©2018
FLIR Systems, Inc. All rights
reserved. 04/16/18

18-0682-SUR-LND-Ranger R5-
Specsheet LTR



The World's Sixth Sense®